
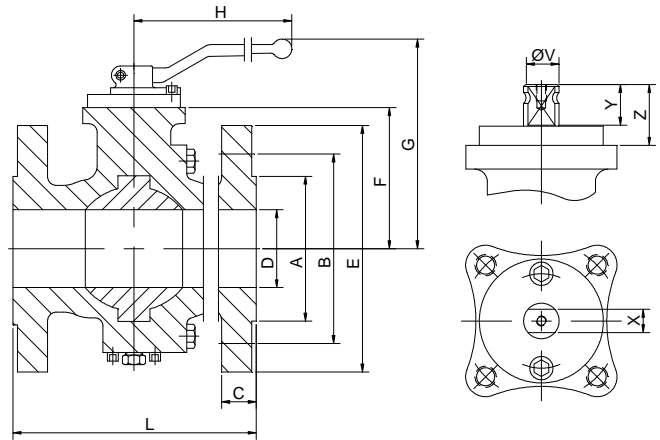


FIG.ZGS 29 SSSGV PN40 DN25-100 F1

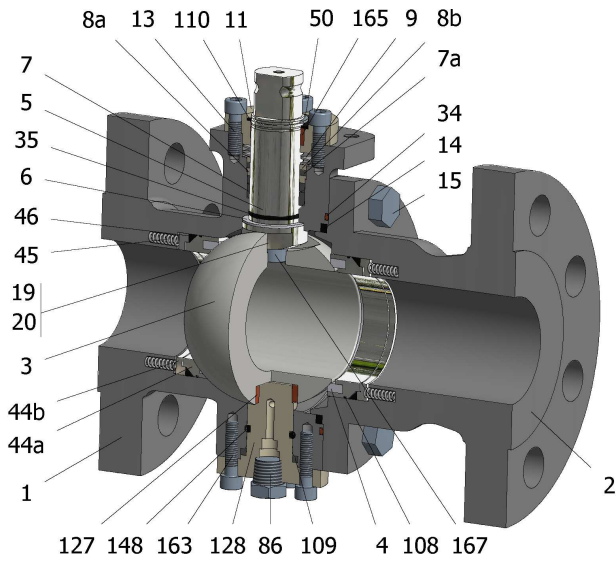

127 148 163 128 86 109 4 108 167

Position	Description	Material
01	Body 1	C.S. 1.6220
02	Body 2	C.S. 1.0352
03	Ball	S.S. 1.4408
04	Seat	PTFE+CG
05	Stem	D.S.S. 1.4462
06	Stem seal	PTFE+CG
07	Stem packing 1	PTFE+CG
07a	Stem packing 2	Graphite
08a	Gland packing 1	S.S. 1.4401
08b	Gland packing 2	S.S. 1.4401
09	Spring washer	S.S. 1.4310
11	Cover	S.S. 1.4408
13	Cover bolt	A4-70
14	Body seal 1	PTFE+CG
15	Body bolt	A2-70
16	Handle	WCB
17	Handle bolt	1.045(8.8)
19	Spring	Inconel X750
20	Antistatic ball	Inconel 625
34	Body seal 2	Graphite
35	O ring stem	FKM
44a	Ring seat 1	S.S. 1.4401
44b	Ring seat 2	S.S. 1.4401
45	Spring seat	Inconel X750
46	Seat seal	Graphite
50	Subjection ring	S.S. 1.4021
86	Drain plug	C.S. A350 LF2
86a	Vent plug	C.S. A350 LF2
108	O ring seat	FKM
109	Cover seal	Graphite
110	Subjection ring seal	S.S. 1.4401 Nitrided
127	Stem bearing	MU
128	Body cover 2	C.S. 1.0352
148	O ring cover	FKM
167	Stem guide bolt	A2-70 Nitrided
163	Body cover 2 bolt	A4-70
165	Stem bearing	PTFE+FG

General features


- Full trunnion.
- Split body.
- Full bore.
- Soft seat.
- Bidirectional.
- Spring loaded seat system.
- Anti Blow out proof stem.
- Autoadjustable packing.
- Anti static device.
- Self-cavity pressure relief.
- Double Block and Bleed.

Standards


- Top flange ISO 5211
- Flanges EN 1092-01
- Face to face EN 558
- Design EN-12516, ISO 17292
- Testing EN-12266, ISO 5208

Official approvals

- CERTIFICATE FIRE SAFE
- TA-LUFT
- ATEX 94-9EC
- PED 97/23/CE.
- SIL 3 CAPABLE
- EN 161/EN 264

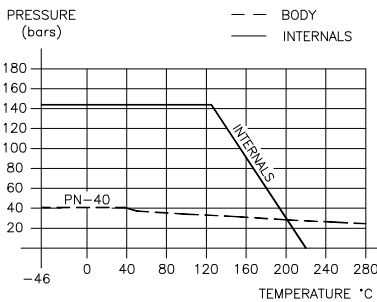

PEKOS GROUP CERTIFICATES:
ISO 9001-2008 / 97-23-CE / API-6D

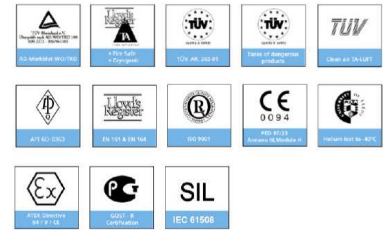

DIMENSIONS & Technical information

DN	PN	D	L	E	A	B	C	F	H	G	V	X	Y	Z	n x d	ISO 5211	Torque	MAST	Weight
25	40	25	160	115	68	85	18	58	185	122	18	14	17	20	4 x 14	F05	38	207,5	8,0
40	40	40	200	150	88	110	18	75	293	144	22	17	20	30	4 x 18	F07	75	549,6	11,5
50	40	50	230	165	102	125	20	84	293	153	22	17	20	30	4 x 18	F07	94	549,6	17,0
80	40	80	310	200	138	160	24	114	350	205	28	22	22	40	8 x 18	F10	242	1146,9	37,5
100	40	100	350	235	162	190	24	128	350	220	28	22	22	40	8 x 22	F10	395	1146,9	59,5

** Depending on service conditions.

* Dimensions are in mm.

* Torque & MAST are in Nm.

* Weight is in Kilogram

* Torque values have been measured ΔP at maximum rating at room temperature

DS-3513
Rev.0